

# Lithium Primary Battery (Li-SOCl<sub>2</sub>)

## CLE-03


3.6V, 1/2AA Bobbin

COROS+

### Specifications

Standard	ER14250
Nominal Voltage	3.6V
Nominal Capacity (@~1mA, to 2.0V)	1.2Ah
Max. Cont. Current	40mA
Max. Pulse Current	80mA
Operating Temp. range	-55~+85°C
Lithium Contents	~0.3g
Weight	9g
UL Filing No.	MH62104

### Dimension




### Available Terminals & Connectors

T1, T2, T3, T3R, T3EU, T3EUR, AX,  
Wire, C&W, Case (custom type)


### WARNING

Fire, explosion, and severe burn hazards.  
Do not disassemble  
Do not heat above 100°C  
Do not recharge, short circuit, crush, incinerate, or expose contents to water


Discharge Characteristics at +25°C

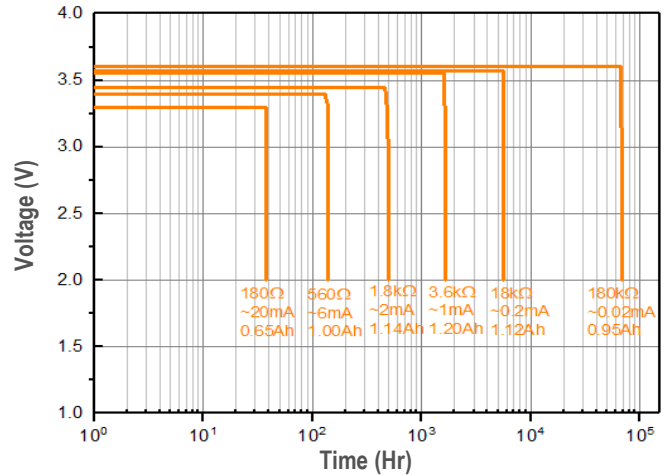

Capacity vs. Current

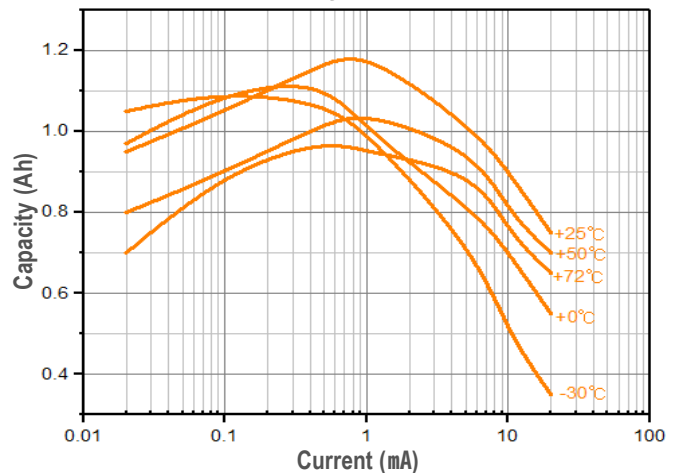

Voltage vs. Temperature

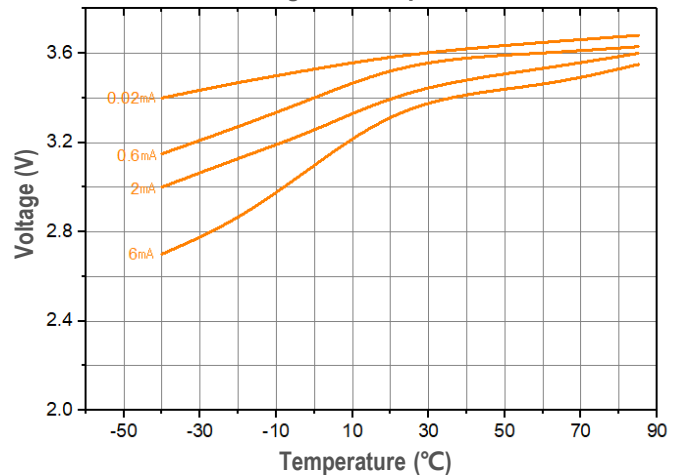

(Typical values stored at 25°C for one year)