

# Lithium Primary Battery (Li-SOCl<sub>2</sub>)

# CLE-14


3.6V, C Bobbin



## Specifications

Standard	ER26500
Nominal Voltage	3.6V
Nominal Capacity (@~3mA, to 2.0V)	8.5Ah
Max. Cont. Current	150mA
Max. Pulse Current	300mA
Operating Temp. range	-55~+85°C
Lithium Contents	~2.4g
Weight	51g
UL Filing No.	MH62104

## Dimension

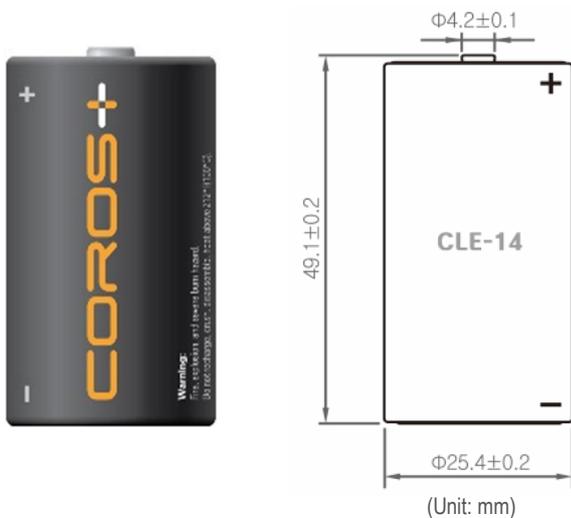


## Available Terminals & Connectors

T1, AX, Wire, C&W (custom type)


## WARNING

- Fire, explosion, and severe burn hazards.
- Do not disassemble
- Do not heat above 100°C
- Do not recharge, short circuit, crush, incinerate, or expose contents to water


Discharge Characteristics at +25°C

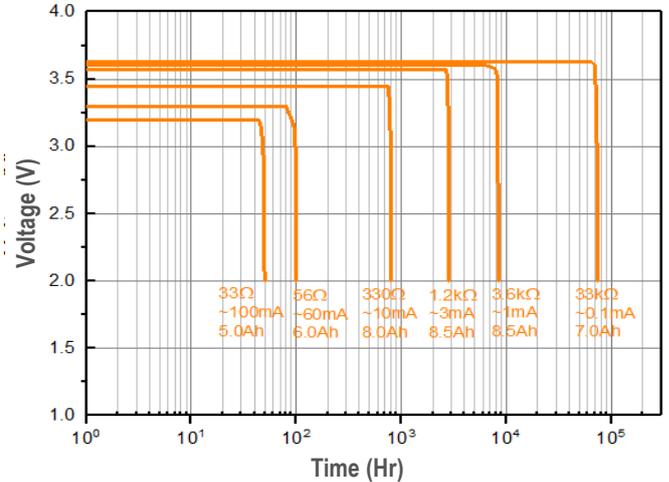

Capacity vs. Current

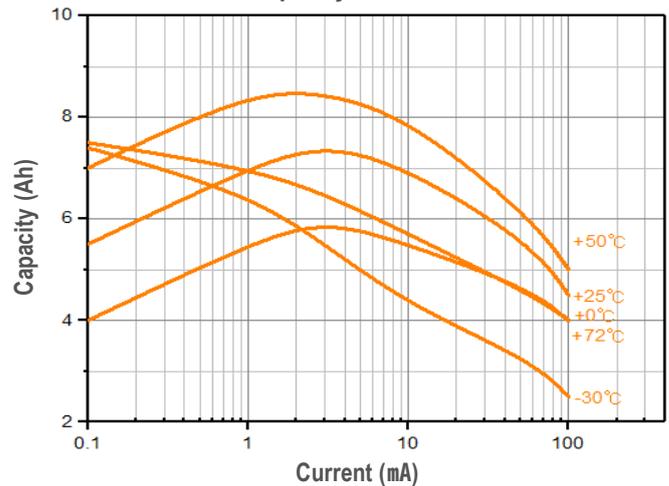

Voltage vs. Temperature

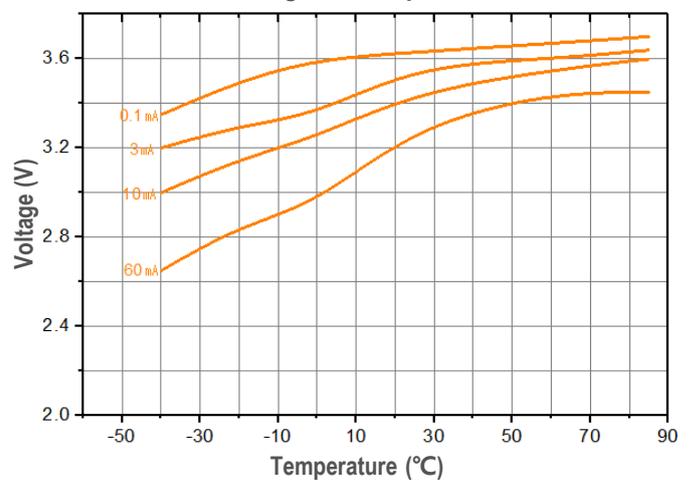

(Typical values stored at 25°C for one year)