

Lithium Primary Battery (Li-MnO<sub>2</sub>)

# CR14250E


3.0V, 1/2AA Bobbin

COROS+

## Specifications

Standard	CR14250
Nominal Voltage	3.0V
Nominal Capacity (@~0.5mA, to 1.5V)	950mAh
Max. Cont. Current	7mA
Max. Pulse Current	70mA
Operating Temp. range	-40~+85°C
Lithium Contents	~0.3g
Weight	12g
UL Filing No.	MH46165

## Dimension

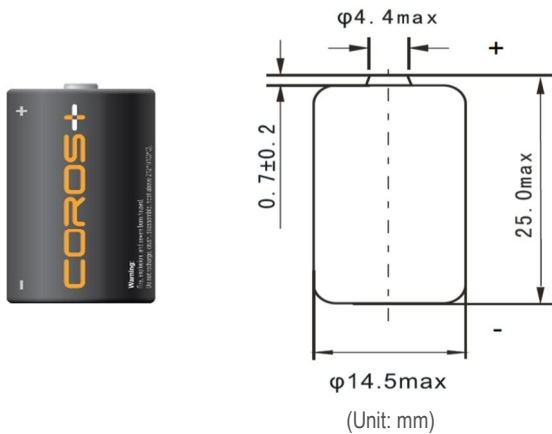


## Available Terminals & Connectors

T1, T2, T3, T3R, T3EU, T3EUR, AX,  
Wire, C&W, Case (custom type)


## WARNING

Fire and burn hazard. Do not recharge, short circuit, over discharge, crush, disassemble, 100°C or incinerate. Keep battery far away from children, put them in original package until ready to use. Dispose of used batteries promptly.


Discharge Characteristics (at 25°C)

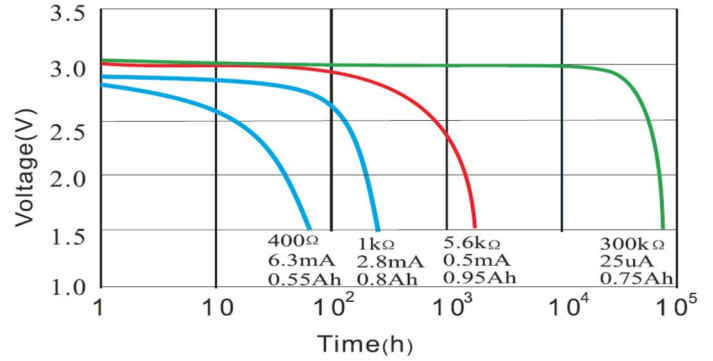

Capacity vs Current

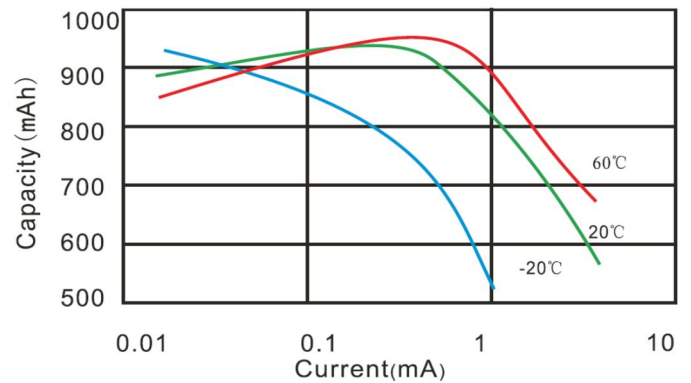

Voltage vs Temperature

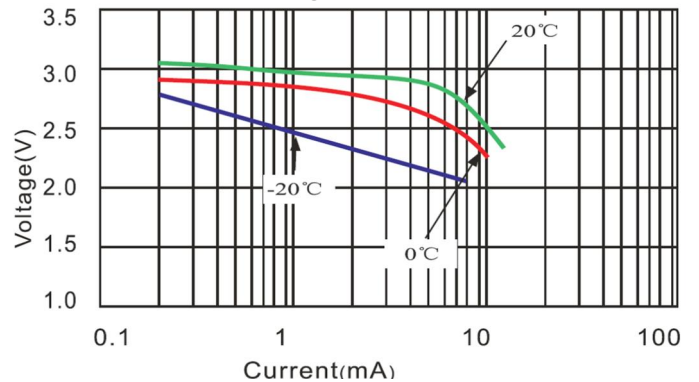

Discharge Characteristics after Storage

