

Lithium Primary Battery (Li-MnO₂)

CR14505E


3.0V, AA Bobbin

COROS+

Specifications

Standard	CR14505
Nominal Voltage	3.0V
Nominal Capacity (@~2.8mA, to 1.5V)	2000mAh
Max. Cont. Current	15mA
Max. Pulse Current	100mA
Operating Temp. range	-40~+85°C
Lithium Contents	~0.7g
Weight	23g
UL Filing No.	MH46165

Dimension

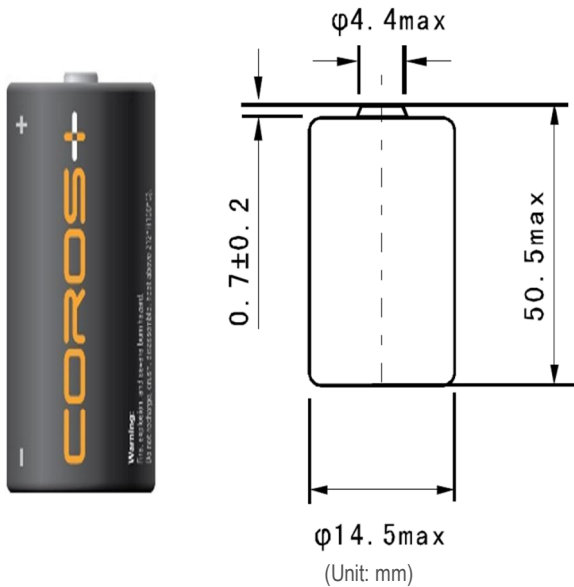


Available Terminals & Connectors

T1, T2, T3, T3R, T3EU, T3EUR, AX,
Wire, C&W, Case (custom type)


WARNING

Fire and burn hazard. Do not recharge, short circuit, over discharge, crush, disassemble, 100°C or incinerate. Keep battery far away from children, put them in original package until ready to use. Dispose of used batteries promptly.


Discharge Characteristics (at 25°C)

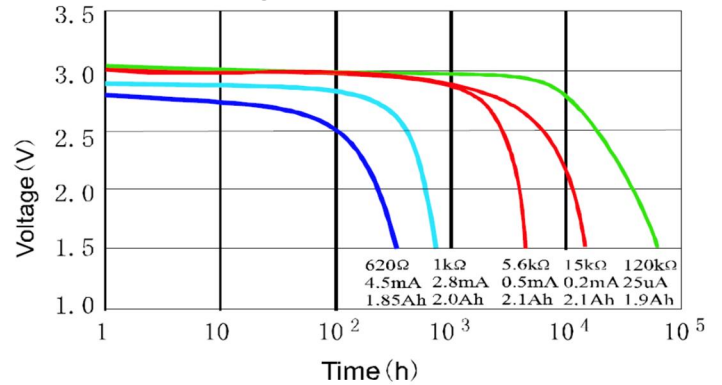

Capacity vs Current

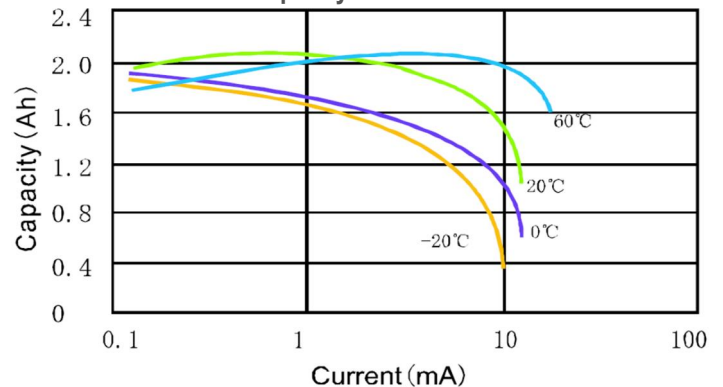

Voltage vs Temperature

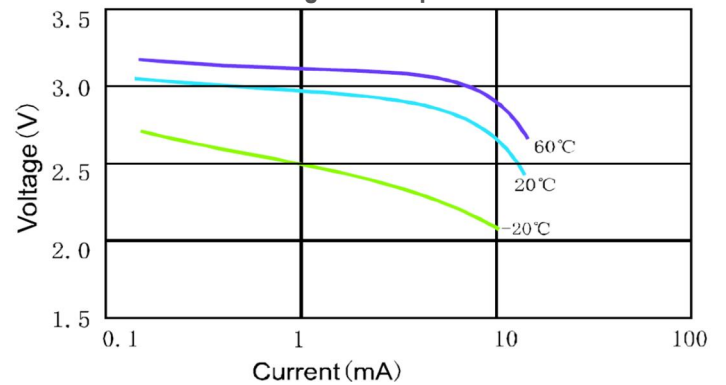

Discharge Characteristics after Storage

