

Lithium Primary Battery (Li-MnO₂)

CR17450H



3.0V, 4/5A Spiral

COROS+


Specifications

Standard	CR17450
Nominal Voltage	3.0V
Nominal Capacity (@~100mA, to 1.5V)	2400mAh
Max. Cont. Current	1500mA
Max. Pulse Current	3000mA
Operating Temp. range	-40~+70°C
Lithium Contents	~0.9g
Weight	22g
UL Filing No.	MH61795


Dimension

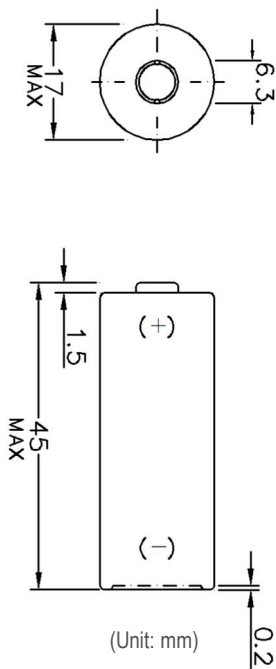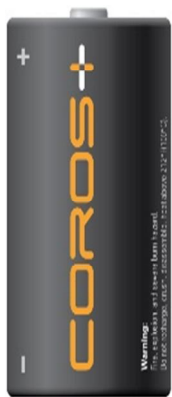


Discharge Characteristics (100mA)

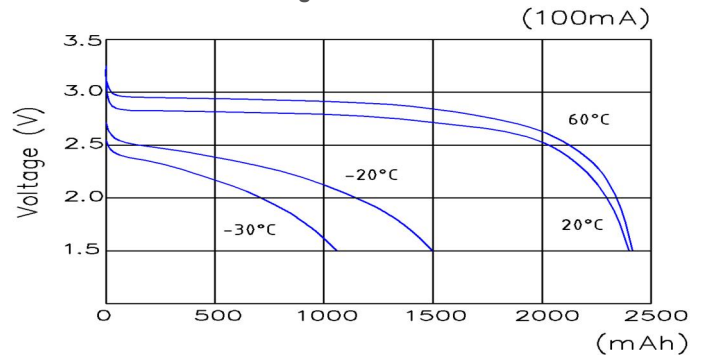

Continuous Current Discharge

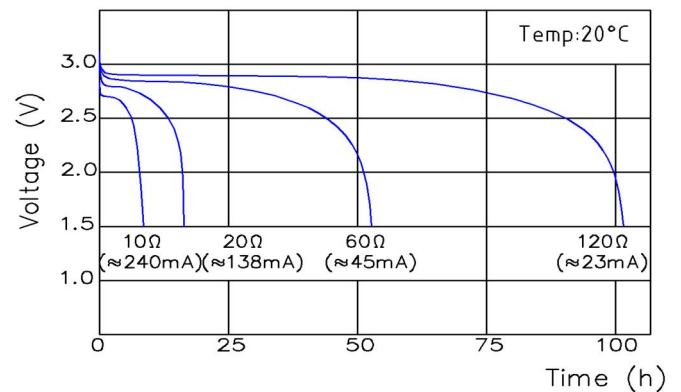

Pulse Current Discharge

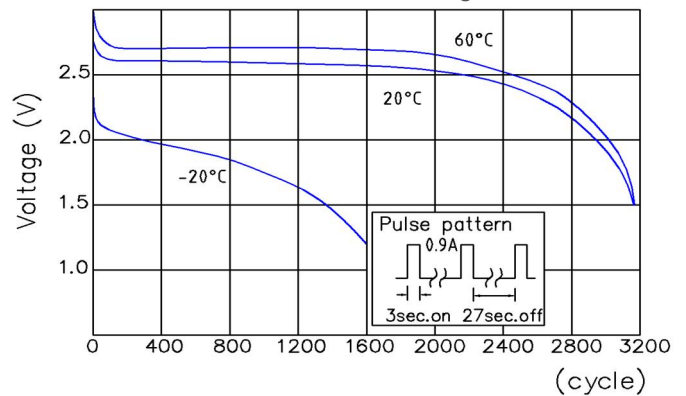

WARNING

Fire and burn hazard. Do not recharge, short circuit, over discharge, crush, disassemble, 100°C or incinerate. Keep battery far away from children, put them in original package until ready to use. Dispose of used batteries promptly.

COROS BATTERY CO., LTD. www.corosbattery.com info@corosbattery.com

V-19A

Any values in this data sheet are only for information purpose and not the warranty of future performance and they are subjected to change without notice.