

Lithium Primary Battery (Li-SOCl₂)

CLE-14


3.6V, C Bobbin

COROS+

Specifications

Standard	ER26500
Nominal Voltage	3.6V
Nominal Capacity (@~3mA, to 2.0V)	8.5Ah
Max. Cont. Current	150mA
Max. Pulse Current	300mA
Operating Temp. range	-55~+85°C
Lithium Contents	~2.4g
Weight	51g
UL Filing No.	MH66316

Dimension

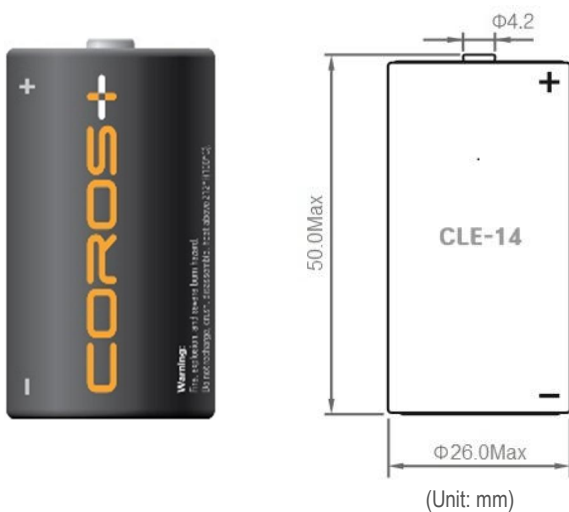


Available Terminals & Connectors

T1, AX, Wire, C&W (custom type)


WARNING

Fire, explosion, and severe burn hazards.
 Do not disassemble
 Do not heat above 100°C
 Do not recharge, short circuit, crush, incinerate, or expose contents to water


Discharge Characteristics at +25°C

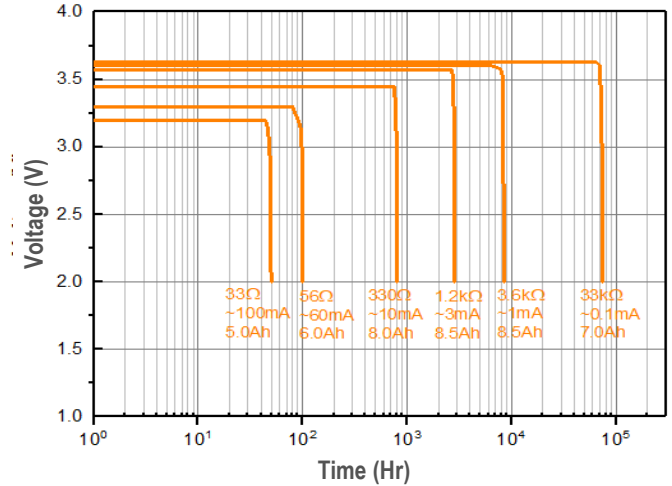

Capacity vs. Current

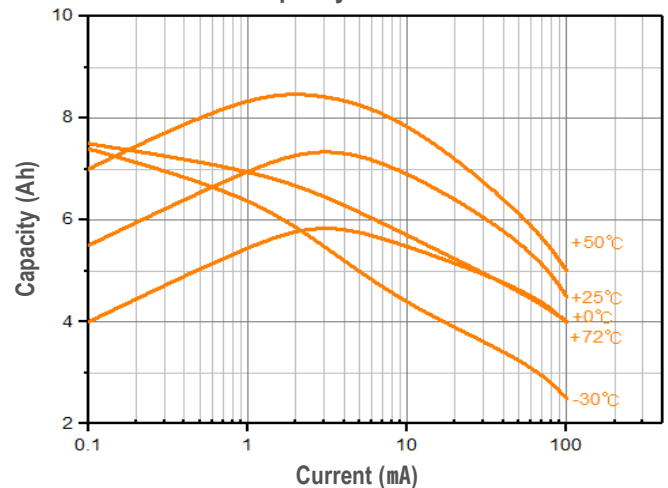

Voltage vs. Temperature

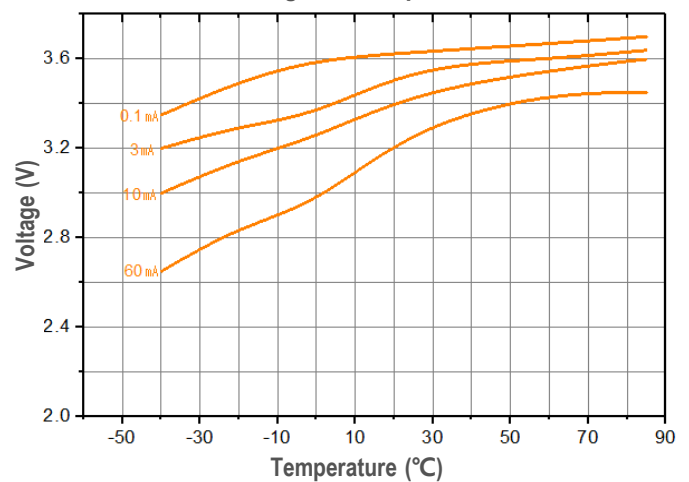

(Typical values stored at 25°C for one year)